



LCD-DISPLAY YM-2002B Series

20X2 CHARACTERS
1/16 DUTY, 1/5 BIAS

OUTLINE DIMENSIONS

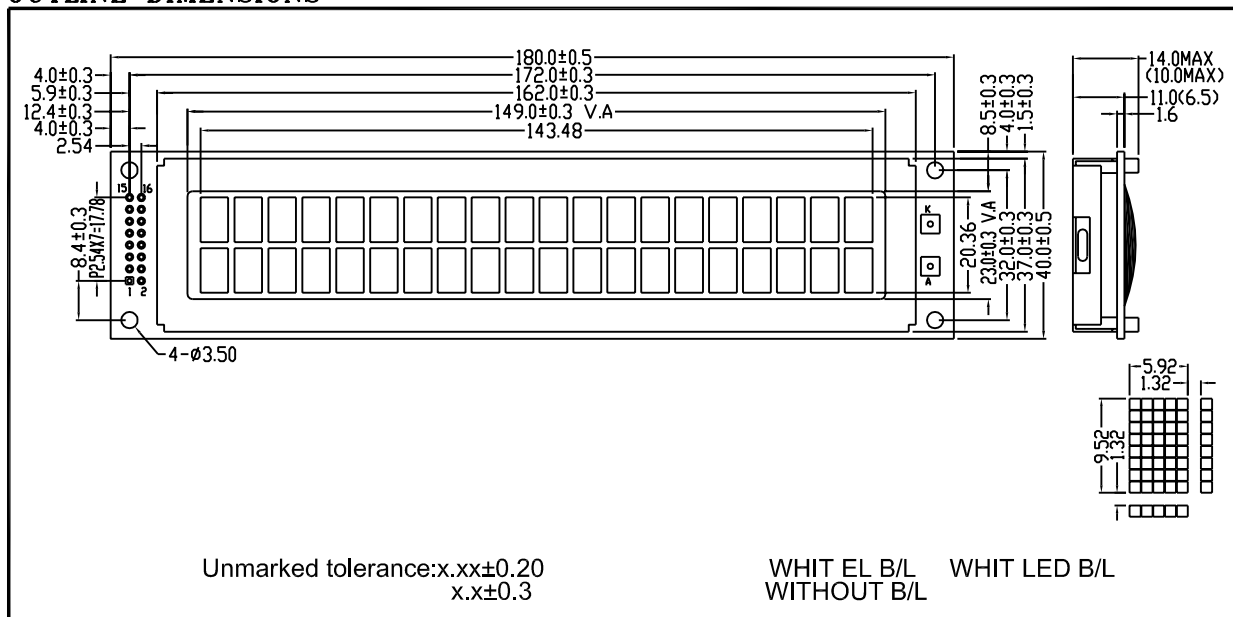

BLOCK DIAGRAM & POWER SUPPLY

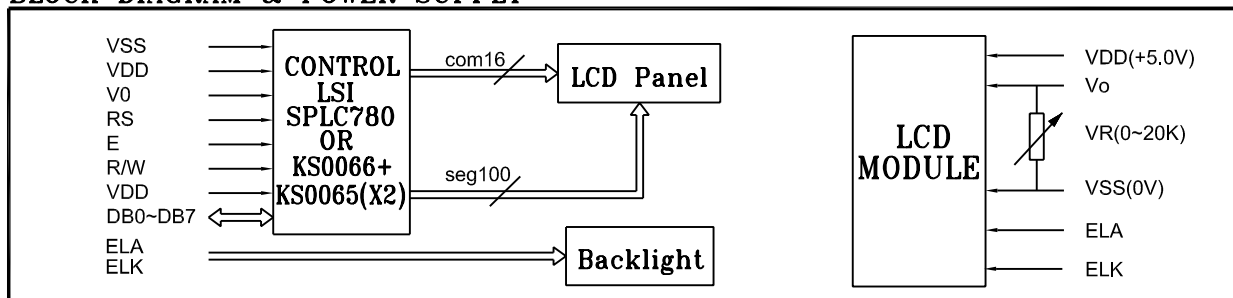

MECHANICAL SPECIFICATION & FEATURE

Item	Normal Dimensions(mm)	FEATURE	
Module Size(W*H*T)	180.0X40.0X10.0/14.0	LCD Type	STN, TN, HTN, FSTN
View Area(W*H)	149.0X23.0	LCD Colour	STN:Yellow-Green, Grey Other:Gray
Character Pitch(W*H)	7.24X10.84	View Angle	6 O'Clock, 12 O'Clock
Character size(W*H)	5.92X9.52	Display Type	Positive Type, Negative Type
Character Font	5X8	Real polarizer	Transmissive, Reflective, Transflective
Dot Pitch(W*H)	1.20X1.20	Operating Temperature	-10°C~60°C, -20°C~70°C
Dot Size(W*H)	1.12X1.12	Backlight	LED:Yellow EL:Green,Blue-Green,blue Without

ELECTRICAL CHARACTERISTICS

Item	Symbol	Symbol	Min.	Typ.	Max.	Unit
Operating Voltage	Vdd	Ta=25°C	---	5.0	---	V
Operating Voltage LCD	Vlcd	Ta=25°C	---	4.7	---	V
Supply Current	Idd	Ta=25°C, Vdd=5.0V	---	2.0	3.0	mA
Supply Current for Backlight	If	Ta=25°C, Vf=4.2V	---	---	---	mA

INTERFACE PIN CONNECTIONS

Pin No.	Symbol	Level	Description
1	K	---	Backlight(0V)
2	A	---	Backlight(+5.0V)
3	VSS	---	Ground for Logic
4	VDD	---	Power supply for Logic(+5.0V)
5	V0	---	Power supply for LCD drive
6	RS	H/L	Register selection (H:DATA register, L:Instruction register)
7	R/W	H/L	Read/Write selection (H:Read, L:Write)
8	E	H/L	Enable signal for LCM
9~16	DB0~DB7	H/L	Data Bus lines

REMARK

Operating voltage option : 5.0V or 3.0V
CGROM font option : English Japanese Russian etc