



- NOTES:
- 1.DISPLAY TYPE:
 - 2.VIEWING ANGLE:
 - 3.POLARIZER MODE:
 - 4.OPERATING TEMP:
 - 5.STORAGE TEMP:
 - 6.LOGIC VOLTAGE:
 - 7.LCD DRIVER VOLTAGE:
 - 8.DRIVE METHOD:
 - 9.DRIVE IC:
 - 10.BACKLIGHT TYPE:

STN/BLUE
6:00
TRANSFLECTIVE/NEGATIVE
-10°C ~ +60°C
-20°C ~ +70°C
VDD=5.0V
Vop=4.8V
1/16DUTY 1/5BIAS
S6A0069
WHITE SIDE LED

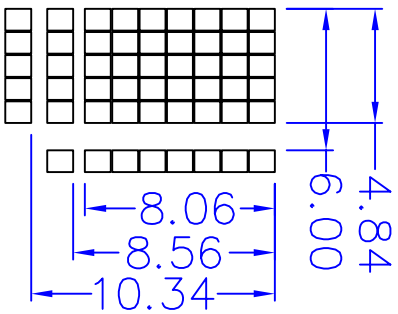

PIN	1	2	3	4	5	6	7	8
NAME	VDD	VSS	V0	RS	R/W	E	D0	D1
PIN	9	10	11	12	13	14	15	16
NAME	D2	D3	D4	D5	D6	D7	A	K

SCALE: 2/1

 深 圳 市 耀 宇 科 技 有 限 公 司 SHENZHEN YAO YU TECHNOLOGY CO., LTD				DRAWN	ME CHECKED	EE CHECKED	APPROVED
DRAW NO.	YMSC-C1602LDBSWSN	DRAWN		ME CHECKED		EE CHECKED	
UNIT:mm	PAGE:1/1	VER: A	SCALE:1/1				
TOLERANCES UNLESS:±0.1							