

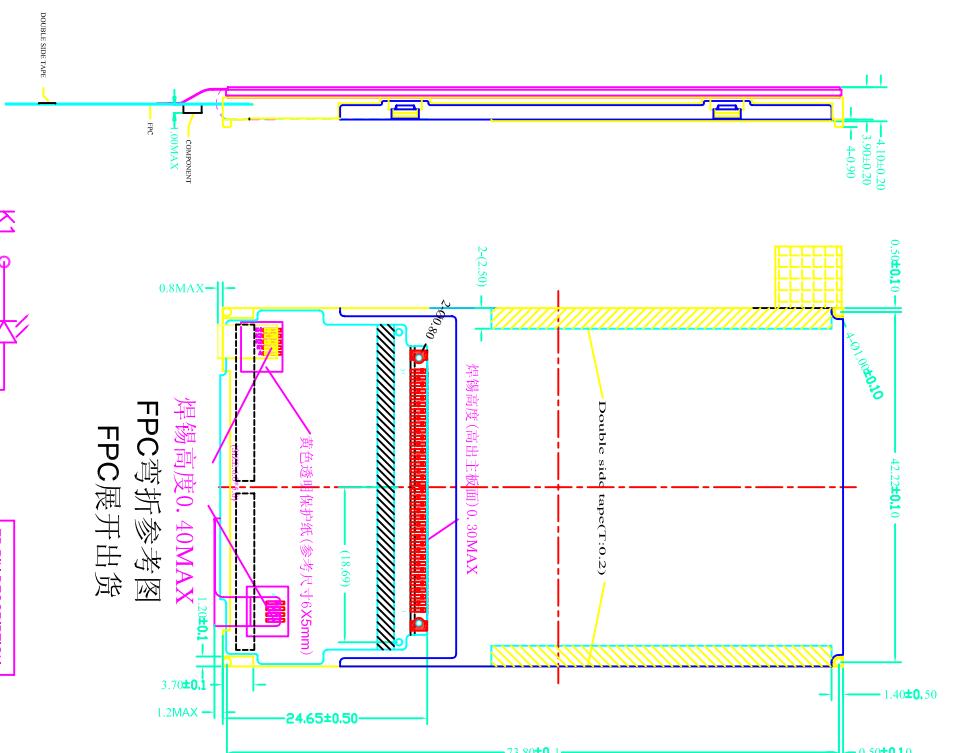


客户确认签名:

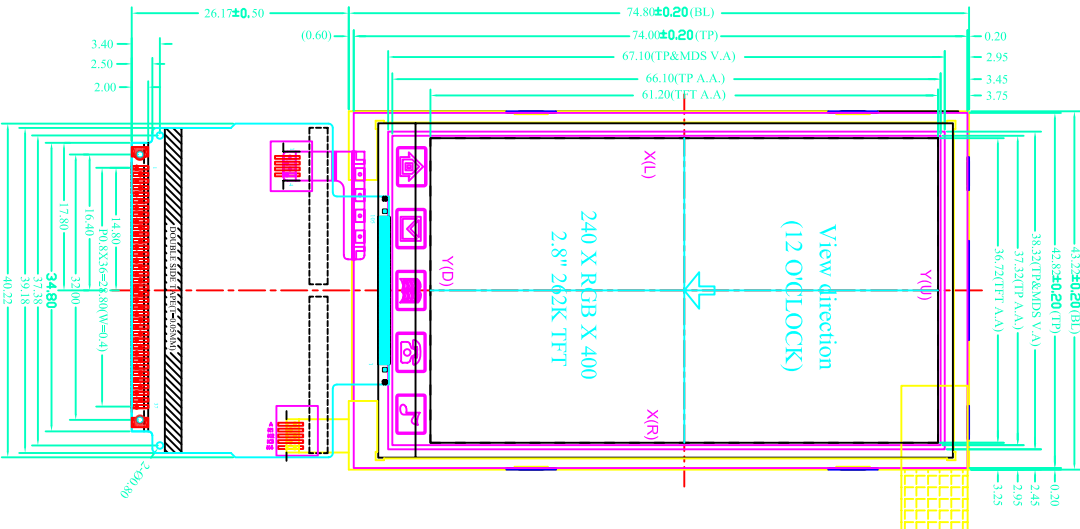

NO.	Pin name	NO.	Pin name
1	NC	24	DB10
2	X(L)	25	DB11
3	Y(U)	26	DB12
4	X(R)	27	DB13
5	Y(D)	28	DB14
6	GND	29	DB15
7	IOVCC	30	RESET
8	VCCM/Q1	31	GND
9	FMARK	32	A
10	CS	33	K1
11	RS	34	K2
12	WR	35	K3
13	RD	36	K4
14	DB0	37	NC
15	DB1		
16	DB2		
17	DB3		
18	DB4		
19	DB5		
20	DB6		
21	DB7		
22	DB8		
23	DB9		

FPC弯折参考图
FPC展开出货



TP PIN DESCRIPTION	TP PIN DESCRIPTION
1	Y(U)
2	X(L)
3	Y(D)
4	X(R)

- NOTES
1. IC : IL19327
 2. TYPE : TFT
 3. DISPLAY MODE : T/M
 4. VIEWING DIRECTION : 12 O'CLOCK
 5. Backlight: 4 Chip parallel
 6. OPERATING TEMPERATURE: -20° C TO 70° C
STORAGE TEMPERATURE: -30° C TO 80° C
 7. GENERAL TOLERANCE : ±0.2
 8. 建议客户外壳开缝尺寸比 MOS V.A. 尺寸单边小0.2MM
 9. 客户面壳底部TP位应保证与TP V.A. 有向外0.4MM的距离

图纸编号	YY-WD-END-001	设计	温华璇 / 100901
产品编号	YM280T-047AT	客户编号	



深圳市耀宇科技有限公司
SHENZHEN YAO YU TECHNOLOGY CO., LTD

单位	mm	公差	±0.2	页数	1/1	视角	
版本	A0		±5.0°	比例	1 : 1		